

DACO DTR LABEL REWINDER



The Daco DTR range was introduced as customers were asking for a simple to use low cost label rewinder. A short and simple web path keeps wastage to an absolute minimum and a wide range of options allow you to configure the machine to your exact requirements.

The machine base platform utilizes mechanical mandrels on the unwind and rewind, the machine has automatic taper

tension control on the unwind and also incorporates an end of roll feature.

A choice of razor, rotary or crush cut slitting is available dependent on the material being rewound.

The base machine design does not use a nip roller so at no time is the face of the labels touched, this allows for delicate labels and stocks to be rewound. The machine is ideally suited for the rewinding of perforated labels and booklet labels.

Standard Specification

- Web width: 330mm (13")
- Maximum unwind diameter: 457mm (18")
- Unwind with electromagnetic particle brake
 - Taper tension control
 - 76mm (3") mechanical mandrel
 - Programmable end of roll function
- Fixed splice table (plate with a slot)
- Maximum rewind diameter: 457mm (18")
 - 76mm (3") mechanical mandrel
 - Labels in / labels out rewinding
- Maximum web speed: 175metres / minute (575 ft/min) dependent on stock
- Web Speed control, to keep the web speed at a steady speed + / - 10% regardless of changes to roll diameter
- Label Counter - Length / Metres / Feet
- Touch screen HMI operator interface
 - Shows machine status and system messages (interlocks not met etc)
 - Counting options
 - Tension settings
 - Allows for easy and quick jobs set ups
- Quick check

- unwind - with an ultrasonic sensor
- Forwards / Reverse rewinding
- Pneumatic web clamps for splice table
- Replace fixed splice table with adjustable splice table with pneumatic web clamps
- Flag detection
- Splice detection
- Razor slitting with 3 razor knives and lateral adjustment - minimum slit width: 10mm (0.393")
- Additional razor slitting knife holders
- Crush cut slitting - minimum slit width 12.5mm (1/2") (with 3 Tidland knives and lateral adjustment), nip roller, electromagnetic particle clutch and taper tension control
- Additional crush cut slitting knife holders - air operated
- Individual regulator for each air operated crush knife
- Rotary scissor slitting - minimum slit width 16mm (0.62") (with 3 knives and lateral adjustment), nip roller, electromagnetic particle clutch and taper tension control


Optional Equipment

- Upgrade to a floor standing cabinet / main plate
- Upgrade to air mandrels
- Twin product rewinds
- Drello - Labelscope 3125 - (400 x 300mm illumination area @ 0.3m)
- Range of mechanical rewind mandrels: 38-102mm (1.5" - 4")
- Range of air rewind mandrels: 25-102mm (1" - 4")
- E & L electronic with an ultrasonic sensor
- E & L electronic web guidance - steered



DACO
DTR
www.daco-solutions.com

DACO DTR VISION - LABEL REWINDER

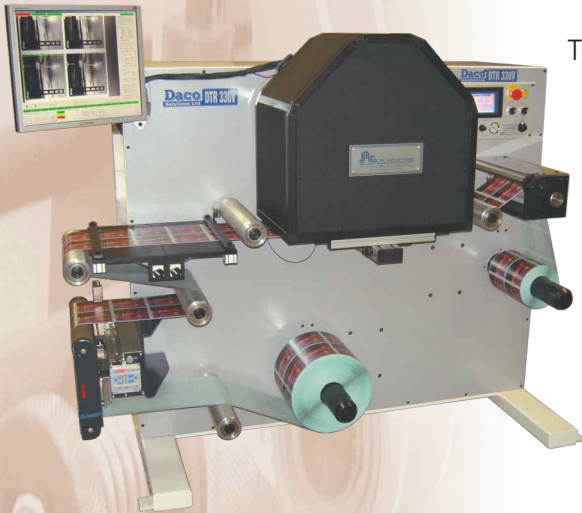

The Daco DTR-V platform has been developed as a direct result of the need for a true 100% inspection platform. The machine has been developed with several of the leading 100% inspection camera manufacturers, and close consultation with customers.

The machine rewinds in both forward and reverse directions so that re-inspection of the label is possible after a

fault is found by the camera system. Once a fault is found the machine comes to a controlled stop and the machine then reverses the fault back to the splice table for correction. The label is then passed back under the camera for re-inspection. Many other systems do not have the ability to re-inspect the defective label, as they do not have the reverse feature. Once the roll is error free the roll can then be slit if needed to the desired width. The DTR-V integral counting facility can count in either labels, feet or metres

Standard Specification

- Web width: 330mm (13")
- Maximum unwind diameter: 457mm (18")
76mm (3") air mandrel
Unwind with electromagnetic particle brake
Taper tension control
Programmable end of roll function
E & L electronic web guidance with an ultrasonic sensor - only operates in forwards direction
- Fixed splice table with interlocked pneumatic web clamps
- Maximum rewind diameter: 457mm (18")
76mm (3") air mandrel
Rewind incorporates electromagnetic particle brake - used when running in reverse direction
Labels in / labels out rewinding
- Maximum web speed: 175metres / minute (575 ft/min) dependent on stock
- Web Speed control, to keep the web speed at a steady speed + / - 10% regardless of changes to roll diameter
- Label Counter - Length / Metres / Feet
- Touch screen HMI operator interface
Shows machine status and system messages (interlocks not met etc)
Counting options
Tension settings
Allows for easy and quick jobs set ups
- Quick check
- Forwards / Reverse rewinding

Optional Equipment

- 100% inspection camera system

- Twin product rewinds
- Range of air mandrels: 25-102mm (1" - 4")
- Replace fixed splice table with adjustable splice table with pneumatic web clamps
- Razor slitting with 3 razor knives and lateral adjustment - minimum slit width: 10mm (0.393") - Bi-directional facility
- Additional razor slitting knife holders
- Crush cut slitting - minimum slit width 12.5mm (1/2") (3 Tidland knives and lateral adjustment) - includes pneumatic nip roller assembly
- Additional crush cut slitting knife holders air operated
- Individual regulator for each air operated crush knife
- Rotary scissor slitting - minimum slit width 16mm (0.62") (3 knives, knife separation, and lateral adjustment) - includes pneumatic nip roller assembly

DACO
DTR
Vision
www.daco-solutions.com



Your Agent is:

www.daco-solutions.com/agents

Manufactured by

Daco Solutions Ltd

Unit 2, Oldbeck Road, Beverley, East Yorkshire, HU17 0JW, England

TEL: +44 (0) 1482 860288 FAX: +44 (0) 1482 880942

E-mail: sales@daco-solutions.com

www.daco-solutions.com